Textures Stone.

REALISTIC EMBOSSED LVT




Six exquisite stone-finish

LVT tiles and feature strips

in extra-matt finish



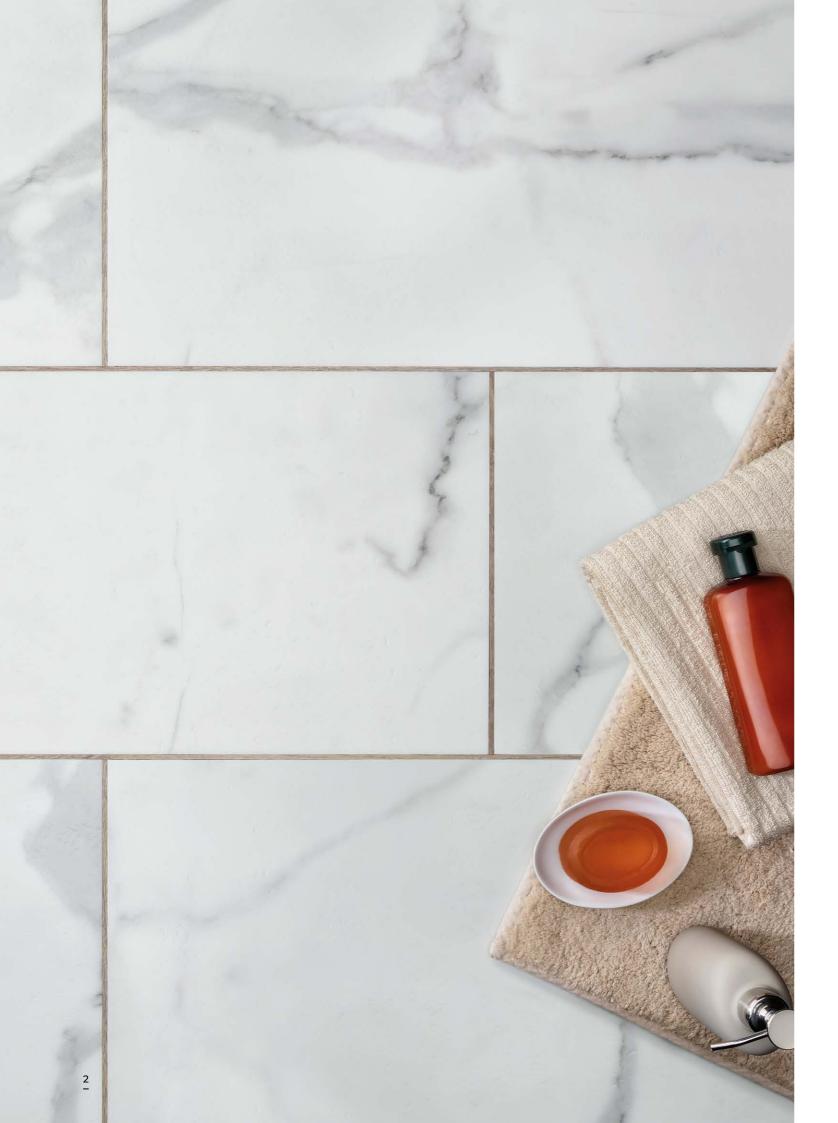

INTRODUCTION

WHY CHOOSE TEXTURES?

Textures Stone[™] blends the beauty of natural stone with the practicality of stick-down LVT (luxury vinyl tile) for the perfect balance of style and performance.

Realistic Embossing is used to mimic the appearance of six varieties stone which delivers a strikingly authentic presence.

With a high degree of functionality and durability in mind, Textures Stone has a wear layer thickness of 0.55mm which is highly scratch, stain and water-resistant, which also makes cleaning simple.

The wear layer is commercially-rated for performance, making it suitable for both residential and commercial areas.

Textures Stone is an excellent choice for kitchens, bathrooms (not wetrooms), conservatories and play areas.





*Guaranteed for use only with water-based UFH (underfloor heating) systems

- Requires glue for installation
- Realistic Embossed texture
- 2.5mm thick with 0.55mm wear layer
- Extra matt finish
- Slip-resistant rated +36
- Water and stain-resistant
- Easy to clean and maintain
- Rated A+ for VOC emissions
- Contains no formaldehyde
- Class 33 Heavy Contract
- 30-year residential warranty
- 15-year commercial warranty
- Matching Feature Strips (see page 19)

Realistic Embossing for a Highly Authentic Appearance

Realistic Embossing is a manufacturing process that adds a very high degree of authenticity. But what does this mean? Simply put, it is a stone-texture surface finish that you can both see AND feel.


Warranties and Peace of Mind

High-end performance of Textures Stone has been achieved through the best industry R&D, placing it at the pinnacle of LVT production.

It is fully backed by 30-year residential and 15-year commercial warranties.



THE TILES

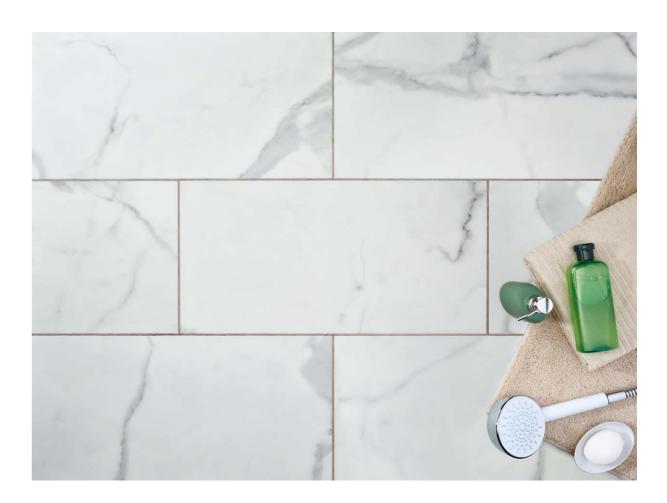

Colours	6
Thickness	2.55mm
Wear layer	0.55mm
Size	304.86mm×609.6mm
Tiles per pack	16 tiles = 2.97m ²
Warranty	30-year residential 15-year commercial

Highly Durable Textures has a commercially-rated 0.55mm thick wear layer which is highly scratch and stain-resistant, suitable for residential and commercial areas.

Highly Realistic

Textures Stone[™] has a highly authentic appearance with a Realistic Embossed surface finish that looks and feels like real stone, along with bevelled edges.

The wear layer is the uppermost surface layer which protects floors from scuffs and scrapes and preserves its appearance for many years.

CARRERA WHITE **TS-01** With Elements[™] LVT Feature Strip LIMED OAK **EFS-03**





Easy to Maintain


Water-Resistant

The range is also highly water-resistant, making it a great choice for kitchens, bathrooms (not wetrooms), conservatories and play areas. Wipe spills away without the need for specialist cleaning.

Textures Stone[™] is very easy to look after. It has a highly scratch and stain-resistant wear layer which preserves its appearance for many years. All that is required is a soft brush and spray mop.

CARRERA DARK **TS-02** With Elements[™] LVT Feature Strip WHITE ASH **EFS-11**



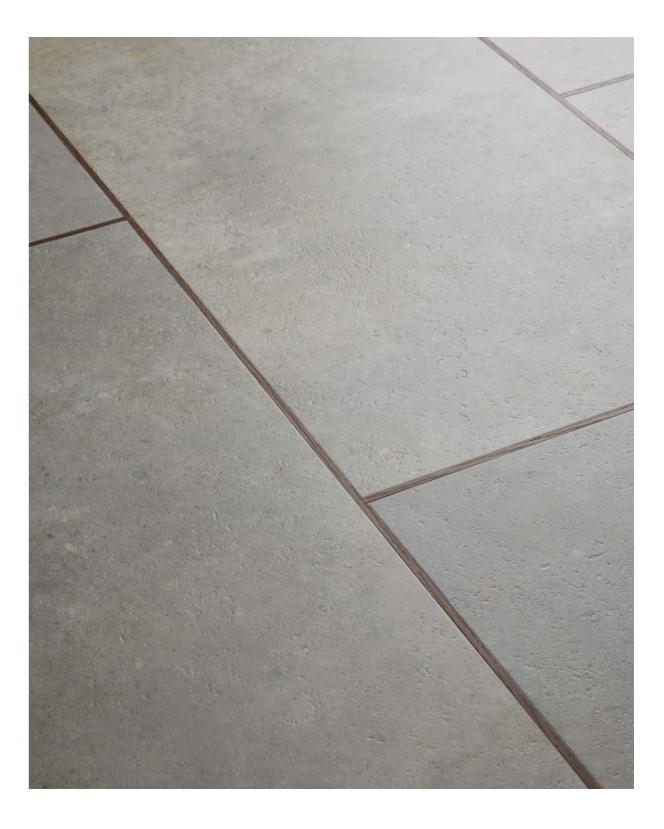


Warm Underfoot

You will find Textures Stone[™] much warmer underfoot than real tiles, making late night trips to the kitchen or bathroom far less frosty.

No Need for Expansion Gaps

Textures Stone[™] is an LVT floor which requires glue for installation. It can be fitted tight against straight and curved walls and fixtures, which means there is no requirement for any expansion gaps.

> GREY STONE **TS-03** With Elements[™] LVT Feature Strip ESPRESSO **EFS-02**

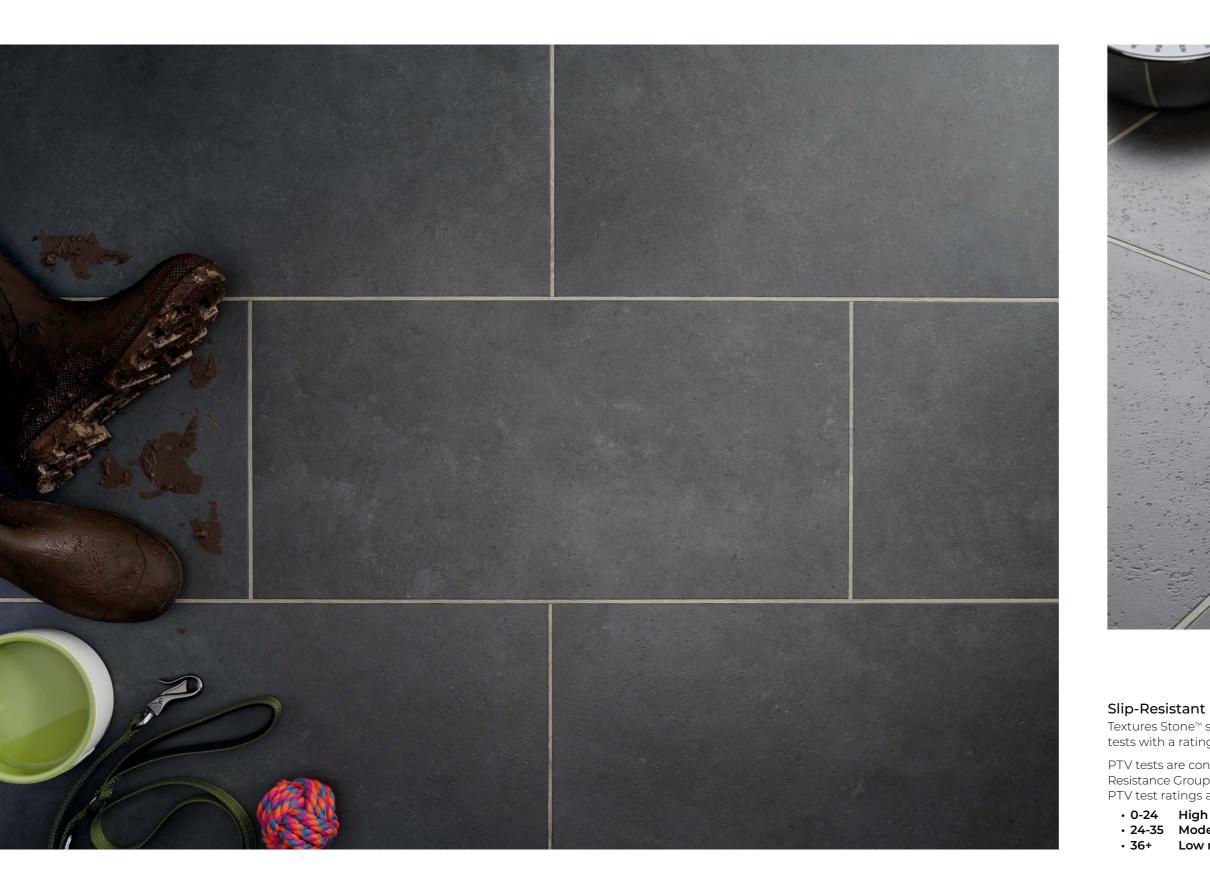



2


Textures Stone[™] scores very highly in PTV (Pendulum Slip Value) tests with a rating of 36+ which is defined as low slip potential.

PTV tests are conducted in accordance with the UKSRG (UK Slip Resistance Group) and HSE (Health and Safety Executive) guidelines. PTV test ratings are clearly defined as follows:

0-24 High risk
24-35 Moderate risk • 36+ Low risk

DARK SLATE **TS-04** With Elements[™] LVT Feature Strip DOVE OAK **EFS-04**



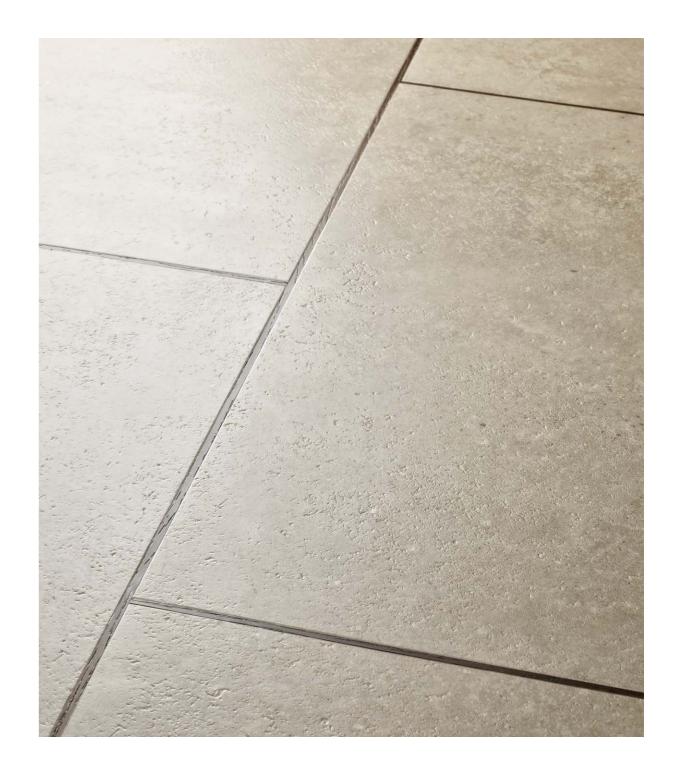

Suitable for Underfloor Heating

With comfort in mind, Textures is manufactured for use in rooms using water-based UFH (underfloor heating) systems.

Surface temperature must not exceed 27°C and flooring must be fitted in accordance with BS EN 1264-2, as well as the UFH manufacturer's guidelines. If other UFH systems are used, please first consult your flooring supplier for suitability.



Safety First

Textures Stone[™] contains no formaldehyde or heavy metals and is rated A+ for VOC emissions. It also achieves Eurofins Gold Certification for Indoor Air Comfort, which is a trusted (and ISO 17065 accredited) certification for legal compliancy.

For additional peace of mind, Textures is also FloorScore™ certified, all of which makes it completely safe for your home.



LIMESTONE **TS-06** With Elements[™] LVT Feature Strip ROYAL OAK **EFS-08**



CARRERA WHITE **TS-01** Available in matching Feature Strip **TSF-01**



CARRERA DARK **TS-02** Available in matching Feature Strip **TSF-02**



GREY STONE **TS-03** Available in matching Feature Strip **TSF-03**








DARK SLATE **TS-04** Available in matching Feature Strip **TSF-04**

SANDSTONE **TS-05** Available in matching Feature Strip **TSF-05**



LIMESTONE **TS-06** Available in matching Feature Strip **TSF-06**

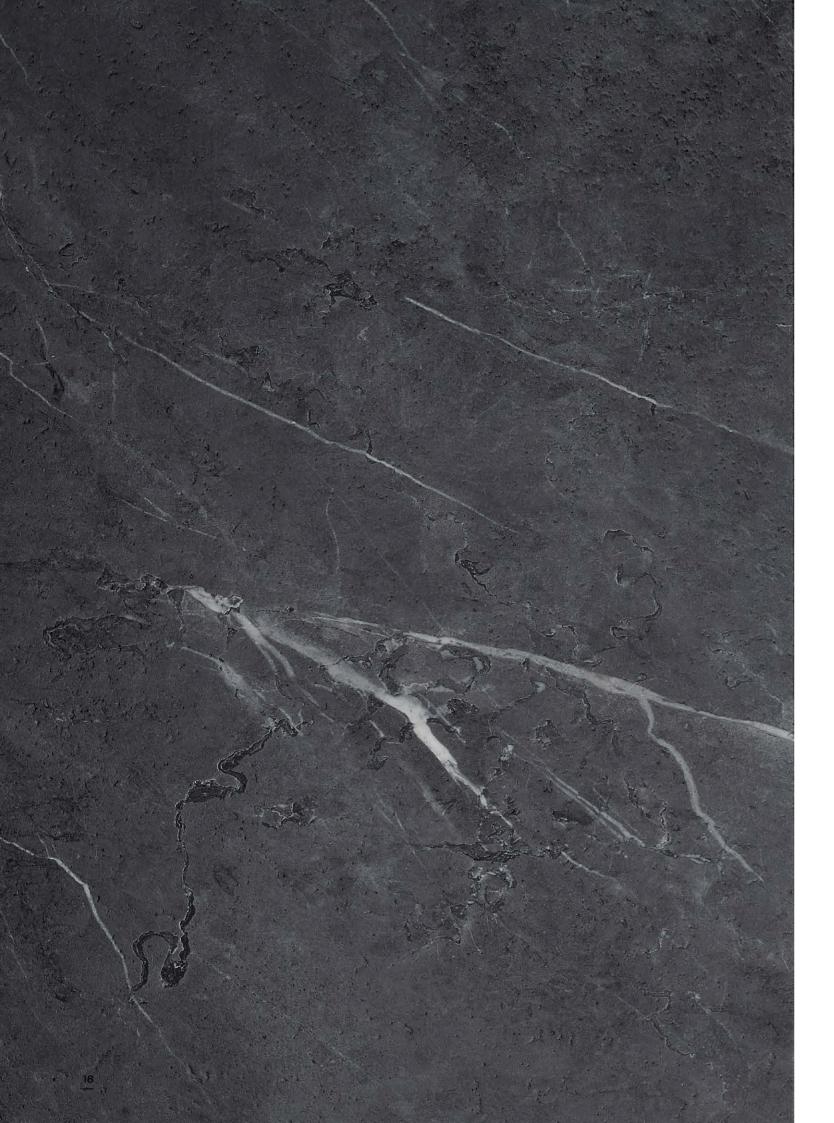

FEATURE STRIPS

Colours	6	Te av
Thickness	2.30mm	w Iq
Wear layer	0.55mm	Sc
Size	4.0mm × 914.4mm (36")	al fo
Pcs per pack	25	Av

CARRERA WHITE TSF-01

CARRERA DARK **TSF-02**

GREY STONE **TSF-03**

DARK SLATE **TSF-04**

SANDSTONE **TSF-05**

LIMESTONE TSF-06

extures Stone™ Feature Strips are now vailable. Use them creatively to contrast vith our wood-finish Textures™ or Elements™ plank and herringbone ranges.

Sold in 36 inch lengths, they are designed to Ilign with the bottom of the bevelled edge ound right across our LVT ranges.

vailable now in packs of 25 units per box.



CARRERA DARK TS-02

Textures Stone REALISTIC EMBOSSED LVT



The Textures Stone™ LVT range has a Declared Slip Rating of 36+ in PTV (Pendulum Slip Value) tests, which is defined as low slip potential. See page 11 for more details.

For a Technical Data Sheet and information on cleaning, maintenance, installation and warranties, please refer to **www.textureslvt.co.uk**